



How to secure the mast on the white Optis

Rigging Notes:

- unfurl sail bundle, step mast and fit sprit
- clip mainsheet block to cockpit floor and thread vang
- fit rudder and ensure retainer clip locks
- clip centreboard retaining line (yellow) to centreboard
- tie down mast using this process


Reverse process to de-rig. Wash boat and sail. Roll sail around mast. Never remove sail from mast.




1: Locate the mast foot in the mast foot cup and identify the mast tie down



2: Thread the end of the mast tie down through the sail downhaul

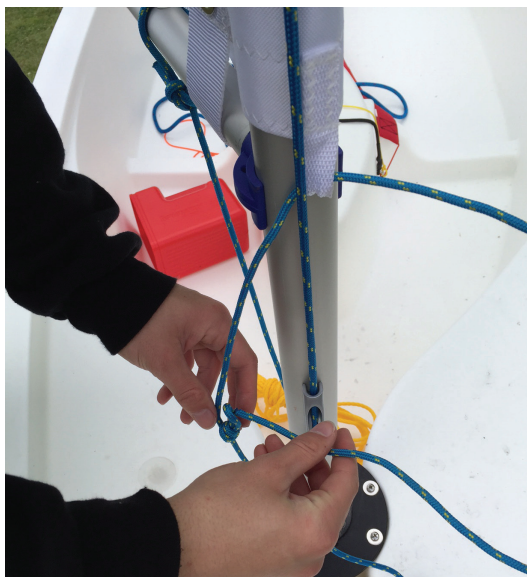

3: Thread the end of the mast tie down back through the tension loop

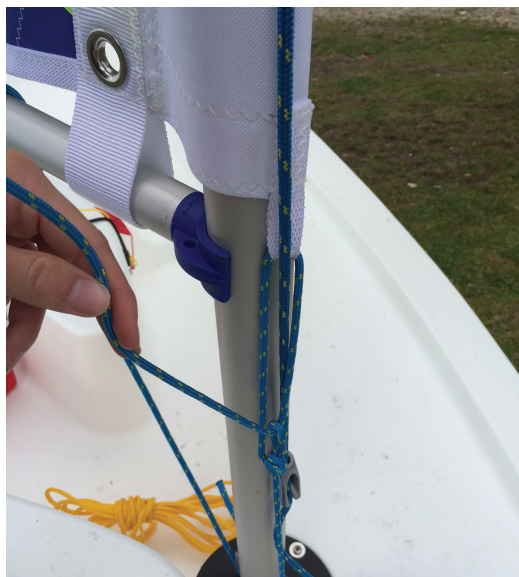

4: Pull the line tight to secure the mast against the base



5: Tie off against itself with two half hitches